

## OFFER LIST




### **Pilous**

Železná 9, 619 00 Brno, Czech Republic

Tel.: +420 543 25 20 10

e-mail: [wood@pilous.cz](mailto:wood@pilous.cz), [www.pilous.cz](http://www.pilous.cz)

## MPO Log loader


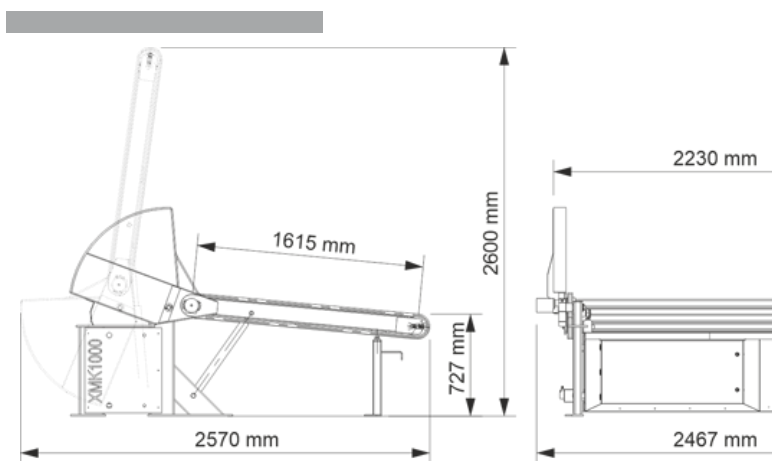


Load capacity 10 000 kg

## DESCRIPTION

The tilting log loader allows fast, convenient and especially safe loading of round logs with a maximum length of 9 m onto the machine bed. Together with the log deck or when incorporated into a XMK handling line, it significantly increases the productivity of the entire operation. It is capable of handling a log with a total weight of up to 10,000 kg. The horizontal movement of the logs is carried out by means of chains that are independently controlled by hydraulic motors. The tilting angle of the arms makes it easier to load even curved, knotted logs. The loader can be easily controlled from a separate control panel by pressing the buttons. The control of individual components of the line can be combined into a larger control panel according to the customer's requirements. If required, the unit can be extended with additional loading arms. Depending on preferences, this unit needs to be retrofitted with a loader support that defines the lower position – see accessories.

## PHOTOGALLERY

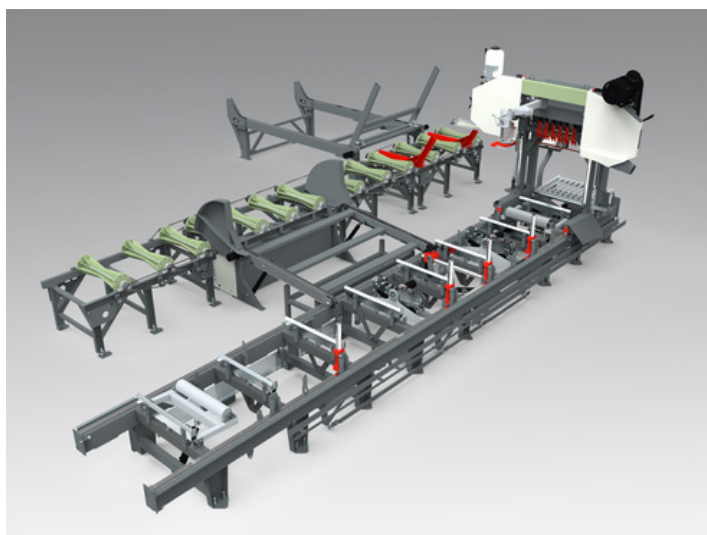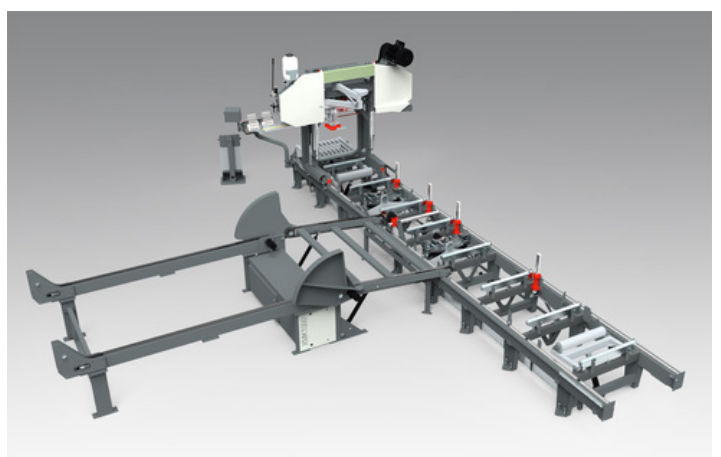

## ACCESSORIES

### ACCESSORIES – SPECIAL ACCESSORIES



**PMP**

#### **PMP Simple loader support**

It defines the lower position of the log loader. It is designed to connect to a sawmill.



**PMP2**

#### **PMP2 Extended loader support**

It defines the lower position of the log loader. It is designed to connect to a sawmill but it can also stand alone.



**OPM - L**

#### **OPM-L Control panel**

Extended version of the basic control panel including a switchboard. It allows you to control multiple components of the XMK line.



**OPM - XL**

#### **OPM-XL Control panel**

Extended version of the basic control panel including a switchboard. It allows you to control multiple components of the XMK line.

